


**DAIHAN-brand® Standard Rotary Viscometer-full Set, with Calibration Certificate, "WVS-0.1M" & "WVS-2M", 1~2,000,000 cP with Standard Spindle-kit(LV1~4), Lifting Stand, Hand Handling Case, 0.3~60rpm, 표준형 디지털 회전 점도계-풀세트**



(1) for 1~100,000cP, "WVS-0.1M" Full set  
(2) for 1~2,000,000cP, "WVS-2M" Full set

- **Included Easy to Use Lifting Stand**
- **Ideal for measuring the Viscosity of Various Liquid such as Grease, Painting, Foodstuff, Dope, Paper making, Cosmetics, Chemical industry, Capsule Stickiness Agent and Medicines.**
- **Included ASTM Standard Spindle-kit of 4 Ea. : LV1 : 15~20K, LV2 : 50~100K, LV3 : 200~400K, LV4 : 1K~2M**
- **Direct Readout of all Measurement Parameters on an illuminated LCD.**
- **The Viscometer is equipped with many Pre-sets speeds : ("WVS-0.1M" : 6- / 12- / 30- / 60- RPM, "WVS-2M" : 0.3- / 0.6- / 1.5- / 3- / 6- / 12- / 30- / 60-RPM)**
- **Auto Range Function to determine the Maximum Viscosity with each Spindle / Speed Combination.**
- **Safety Protection Against Sudden Rises in the Power Supply.**
- \* Data on screen :
  - Speed Selected : RPM
  - Viscosity Reading : cP(mPa.s)
  - Sample Temperature : °C
  - Spindle Selected : S.P.
  - Percentage of Full Scale : %
- \* Viscosity Reading: Dynamic Viscosity (cP or mPa.s)
- \* The Viscometer and the PT100 can be calibrated by the User.
- \* Ultra-sensitive Front Keyboard that allows Easy Input of all Parameters.
- \* Error Message in the Screen with Sound Alarm when the Viscosity of the Test Material exceeds the Full Scale of the selected Combination(SP / rpm.)
- \* Sound Alarm if the Equipment is Working at Under 20% of Selected full Scale
- \* Direct reading in cP(mPa.s) \* without Limits
- \* Can be Use with Various Optional Accessories : RTD Temp. Probe, Micro Printer, Standard Oil(Optional)

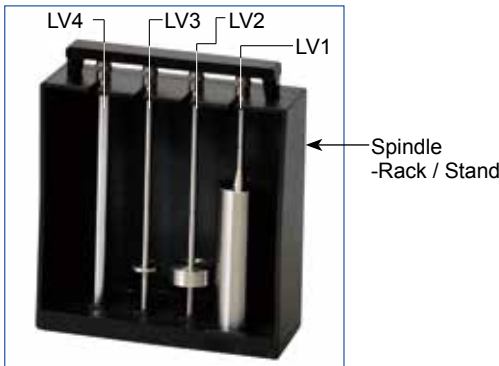

(3) LV1 ~ 4 Spindle kit :  
Included for "WVS-0.1M" & "WVS-2M" Meter

**Specifications & Ordering information**

Spec.	Model	(1) "WVS-0.1M"	(2) "WVS-2M"
Viscosity Range, cP(mPa.s)		1 ~ 100,000 cP	1 ~ 2,000,000 cP
Speed Range (RPM)		6, 12, 30, 60	0.3, 0.6, 1.5, 3, 6, 12, 30, 60
Certificate		with Individual Calibration Certificate	
ASTM Standard Spindle-kit & Measure Viscosity Range : cP		Included Standard Spindle-kit(LV1~LV4), Stainless-steel ① LV1 : 15 ~ 20,000cP    ② LV2 : 50 ~ 100,000cP ③ LV3 : 200 ~ 400,000 cP    ④ LV4 : 1,000 ~ 2,000,000cP	
Measurement Error		± 5% (Newton Liquid)	
Accuracy		± 1.0% of range	
Repeatability		± 0.5%	
Ambient Temperature		5°C ~ 35°C Relative Humidity : ≤80%	
Weight		4 kg	
Electrical Reqts.		AC 230V, 50/60Hz	
Cat. No.	230V	DH.WV1011	DH.WV1012
Price, Each. ₩		1,831,130	2,105,670

\* K=1,000 cP(mPa.s), M=1,000,000 cP(mPa.s)



(4) RTD Temp. Probe

**Spare Spindle-kit**

		Ea. Price, ₩
DH.WV2011	(3) Standard LV Spindle kit, LV1 ~ 4, LV1 : 15~20K, LV2 : 50~100K, LV3 : 200~400K, LV4 : 1K~2M * LV0 Spindle for 1~20cP : Option	423,130

**Optional Temp. Probe/Printer/Standard Oil**

		Ea. Price, ₩
DH.WV2041	(4) RTD Temp. Probe, 0.0~100.0°C, Accu. ±0.1, Resolution 0.1°C	58,450
DH.WV2043	(5) Micro Printer, with RS-232, USB 1.5m Cable (Print Information : Temp., RPM, Spindle, Torque, Viscosity) (6) Standard Oils cP(mPa.s) 400mℓ	204,330

\* The Details for Order : Please See the Last Page of Viscometers



(5) Micro Printer, w/Cable



(6) Standard Oils